



AirCannon™

Belanger's AirCannon™ dryers represent the ultimate in performance, ease of maintenance, safety and effectiveness. Engineered with energy-efficient impellers, Belanger's dryers maximize air velocity performance while using less energy. For operator convenience, AirCannon™ dryers are available in floor mounted or wall mounted designs allowing them to be easily incorporated into various wash configurations.

You decide how many nozzles you need to satisfy your drying requirements. You decide what position and angle of attack works best for each nozzle. Adjustments are easily made by loosening and tightening a few bolts. That's all there is to it.

Unlike other products available on the market, periodic maintenance of our AirCannon™ dryers doesn't require handling heavy motors because we've designed our nozzles and housing to slip on and off easily, leaving the motor in place on the frame. Adjustments to nozzle housing positions also benefit from this design so that only the nozzle housing is moved, and not the motor, enabling operators to quickly make custom adjustments for maximum vehicle coverage.

With so many innovative design features it's no wonder why Belanger AirCannon™ dryers are the preferred finishing touch in vehicle washes the world over.



REQUIREMENTS

Physical Examples

3 Nozzle/30 HP:


Tunnel Space Required	5'	with silencers 6'
Unit Height	11'	with silencers 11'
Unit Width	13' 8"	with silencers 13' 8"
Vehicle Height Clearance	7' 5"	approximately

5 Nozzle/50 HP:

Tunnel Space Required	5' 10"	with silencers 8' 10"
Unit Height	11' 4"	with silencers 11' 4"
Unit Width	13' 8"	with silencers 13' 8"
Vehicle Height Clearance	7' 9"	approximately

7 Nozzle/70 HP:

Tunnel Space Required	5' 10"	with silencers 8' 10"
Unit Height	11' 4"	with silencers 11' 4"
Unit Width	15' 10"	with silencers 15' 10"
Vehicle Height Clearance	7' 9"	approximately

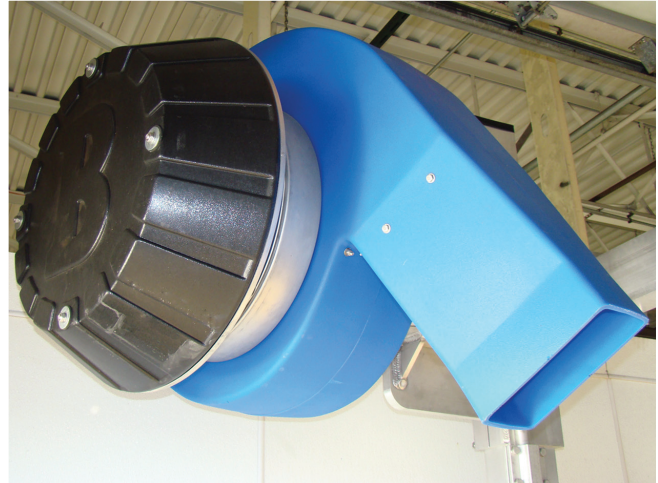


*Shown with available silencer

Utility Examples

Electrical Requirements	AirCannon™ 30	AirCannon™ 50	AirCannon™ 70
208V	96 FLA	160 FLA	224 FLA
230V	84 FLA	140 FLA	196 FLA
460V	42 FLA	70 FLA	98 FLA

COLOR OPTIONS

Choose from two molded dryer housing colors

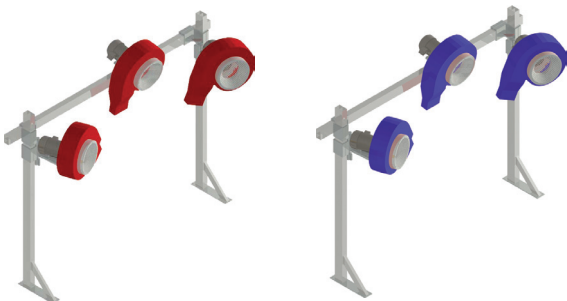

Belanger
1001 Doheny Court
P.O. Box 5470
Northville, MI 48167-5470 USA
belangerinc.com | 248-349-7010

BELANGER 

PART OF

OPW 
VEHICLE WASH
SOLUTIONS
a  company