



Gyro Wrap™

Many medium-volume car washes need a simple, rugged, and compact wrap-around brush capable of washing vehicles fronts, sides and backs in a minimal footprint. The Gyro Wrap™ is the answer. Requiring just over 11 feet of space, the Gyro Wrap™ packs a lot of cleaning power into a small area.

Because side wash wheels take the most abuse, the Gyro Wrap™ is "Built to Tilt"™ through a full 360 degrees, minimizing the likelihood of damage to vehicles and equipment. The oversized socket joint uses a unique spherical bearing to create a maintenance-free 'Flex Head' at the top of the wrap.

This 'Flex Head' enables the Gyro Wrap™ to self-center, as the spinning wheel acts as its own gyrostabilizer. This means the Gyro Wrap™ will firmly hug the contour of each vehicle, washing the front, rear and sides of each, while making the wrap soft and forgiving on mirrors and antennas.

What's more, the simple socket joint design allows the integrated motor and gearbox to 'float' on the sturdy single-piece shaft. This eliminates the troublesome couplings, three-piece shafts and U-joints that competitor's wraps rely on, all while helping maximizing 'uptime' for the operator.



REQUIREMENTS

Physical Examples

Tunnel Space Required 11' 2"
Unit Height 9' 10"
Unit Width 12' 2"

Vehicle Height Clearance 7' 6"
Vehicle Width Clearance 10' 7"

Utility Examples

Hydraulic Drive Option:

Electrical Requirements 120 VAC
Hydraulic Requirements 4 GPM @ 900 PSI
Pneumatic Requirements .3 CFM @ 90-PSI (minimum) 120-PSI (maximum)
Water Requirements 3/4" Feed @ 6 GPM @ 40 PSI

Electric Drive Option:


Electrical Requirements (2) 1 HP, 3-Phase 208/240/480 VAC

Pneumatic Requirements .3 CFM @ 90-PSI (minimum) 120-PSI (maximum)
Water Requirements 3/4" Feed @ 6 GPM @ 40 PSI



COLOR OPTIONS

Choose from two vivid Neo-Tex™ wash colors

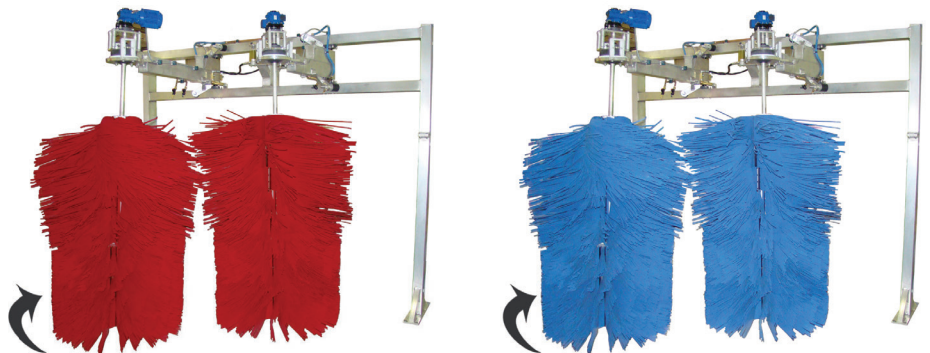

BELANGER 

Belanger
1001 Doheny Court
P.O. Box 5470
Northville, MI 48167-5470 USA
belangerinc.com | 248-349-7010

PART OF
OPW 
VEHICLE WASH
SOLUTIONS
a  DOVER company