

Hybrid Hydro Mitter[™]

High-pressure washing and soft-touch cleaning both have their place in a tunnel car wash. And with Belanger's Hybrid Hydro Mitter™, that place can be the same six feet of tunnel space.

Engineered to fit in just 72 inches, the Hybrid Hydro Mitter[™] combines the cleaning action of a three-rack side-to-side mitter with the washing power of 26 oscillating high-pressure nozzles. Ten of these are 'fixed jet' nozzles that augment the mitter's horizontal and vertical surface cleaning. The other 16 nozzles make up four self-driven spinners that target the lower third of the vehicle, including wheels and rocker panels.

Because operators rely on the Hybrid Hydro Mitter[™] to do so much, it's built for dependable operation and maximum uptime. Its single 2-HP drive uses an epoxy-coated wet environment motor to oscillate both the mitter racks and nozzle arrays. This simple, rugged configuration eliminates hydraulic maintenance requirements, while the system's single grease point is designed to be lubricated just twice per year.





belangerinc.com

DRIVE | CLEAN

Hybrid Hydro Mitter™

REQUIREMENTS

Physical Examples

Tunnel Space Required	6′
Unit Height	11′
Unit Width	12' 6"

7'5" Vehicle Height Clearance Vehicle Width Clearance 9'7"


Utility Examples

Electrical Requirements Water Requirements: High Pressure (2) 1" @ 18 GPM @ 1000 PSI Water Requirements: Mitters

COLOR OPTIONS

Choose from two vivid cloth colors

3-Phase 208/240/480 VAC (1) 3/4" @ 8 GPM @ 40 PSI

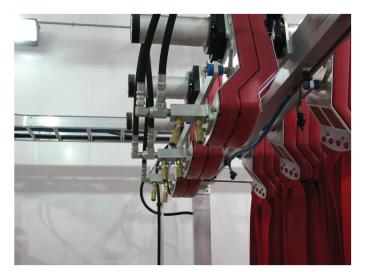

Choose from two vivid plastic wave colors





PART OF

OVER COMPANY

Belanger 1001 Doheny Court P.O. Box 5470 Northville, MI 48167-5470 USA belangerinc.com | 248-349-7010

©2020 Belanger Inc. Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.

DRIVE | CLEAN